

OLC 12x30

Coconut Granular Activated Carbon

Applications



Wastewater



Water Processing



Remediation
Water Treatment



Environmental
Water



Industrial
Wastewater



Pond/Aquarium/
Swim



Surface Water



Liquid Chemical



Drinking Water
(Potable)



Ground Water

OLC 12x30 coconut activated carbon can be used in a variety of water, wastewater and process liquid applications for the removal of dissolved organic compounds. OLC 12x30 has been used in applications such as process water purification, wastewater treatment and industrial chemical purification.

Description

OLC 12x30 is a coconut activated carbon for the removal of dissolved organic contaminants from water, wastewater and process liquids. These contaminants include taste and odor compounds, organic color, total organic carbon (TOC) and industrial chemicals such as chlorinated solvents (TCE, PCE). The pore structure enables it to be used for adsorption of both high and low molecule weight impurities from waters and liquids. This carbon is especially effective for adsorbing trace organic compounds such as vinyl chloride, methylene chloride, MTBE and THM's/disinfection by-products. OLC 12x30 is certified to NSF/ANSI 61 standard.

Features / Benefits

- Coconut carbon
- Low ash
- High mechanical strength
- High hardness relative to other raw materials
- Hardness and abrasion resistance required for thermal reactivation and minimizing generation of fines in operations requiring backwashing
- Pore structure provides a wide range of contaminant removal capabilities

Specifications

OLC 12x30

Iodine Number, mg/g	900 min
Ash, wt%	5 max
Moisture (As packaged), wt%	5 max
12 US Mesh [1.70 mm], wt%	5 max
< 30 US Mesh [0.600 mm] (PAN), wt%	5 max

Safety Message


Wet activated carbon can deplete oxygen from air in enclosed spaces. If use in an enclosed space is required, procedures for work in an oxygen deficient environment should be followed.

1.800.4CARBON calgoncarbon.com


© Copyright 2015 Calgon Carbon Corporation, All Rights Reserved
DS-OLC12x3015-EIN-E1

Typical Pressure Drop (OLC 12x30)

Based on a backwashed and segregated bed

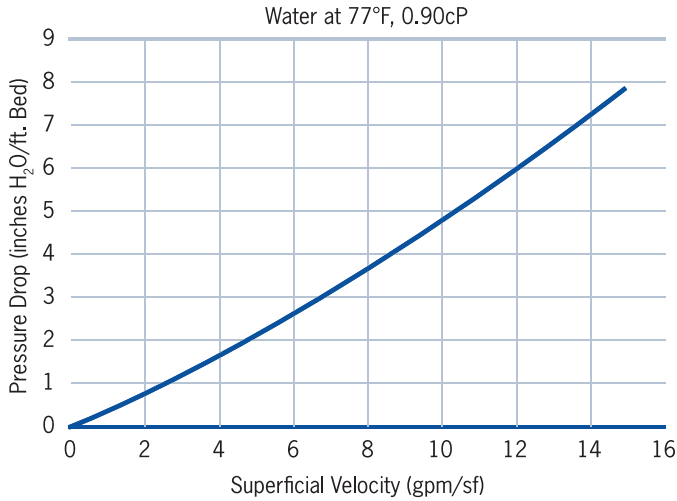

Typical Bed Expansion During Backwash

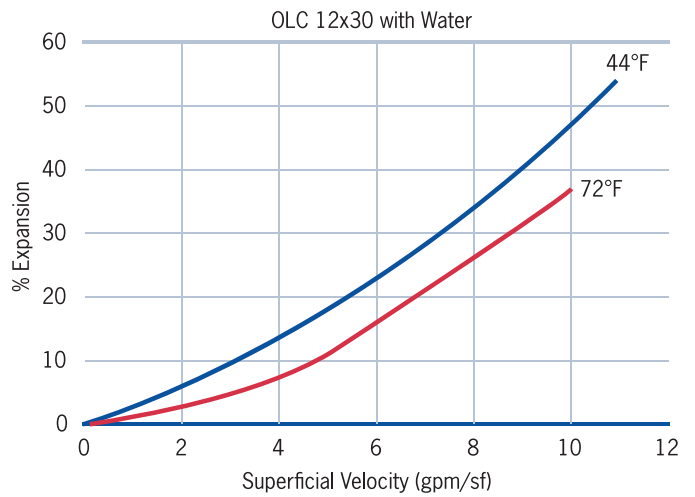

Design Considerations

OLC 12x30 coconut activated carbon is typically applied in down-flow packed-bed operations using both pressure and gravity systems. Design considerations for a carbon system is based on the user's operating conditions, the treatment objectives desired, and the chemical nature of the compound(s) being adsorbed. In general, downflowrate superficial velocity can be from 1 gpm/ft² to 10 gpm/ft², depending on the application and contact times can vary from 7.5 minutes to hours. Design may vary based on the type of liquid, contaminants to remove, and desired treatment objectives.

Safety Message

Wet activated carbon can deplete oxygen from air in enclosed spaces. If use in an enclosed space is required, procedures for work in an oxygen deficient environment should be followed.

1.800.4CARBON calgoncarbon.com

© Copyright 2015 Calgon Carbon Corporation, All Rights Reserved
DS-OLC12x3015-EIN-E1